


Serial / USB port

Multicom 362

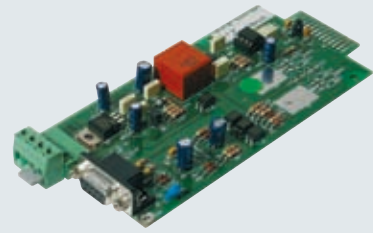


MultiCOM 362 provides a UPS with an additional RS232 serial interface or USB port. The USB port allows the UPS to communicate with Apple Macintosh computers as well as Windows and Linux operating systems.

Characteristics

- Compatible with USB 1 or 2
- Compatible with PowerShield³

Serial / EPO port

Multicom 372

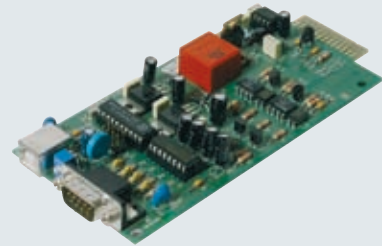


MultiCOM 372 provides a UPS with an additional RS232 serial interface port. The card has Emergency Power Off (EPO) and Remote Shut Down (RSD) inputs with terminal connections.

Characteristics

- EPO and UPS shutdown interface
- 12Vdc 80mA contact option

Contacts / EPO board

Multicom 382

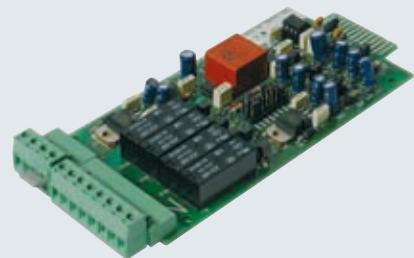

MultiCOM 382 provides a set of relay contacts to provide UPS alarm and status indication.

The contacts are connected through terminal connections. Signal contacts include Emergency Power Off (EPO), Remote Shut Down (RSD), On Battery, On Bypass, Alarm and Low battery. The contacts are change over or normally open.

Characteristics

- Max. 3A current at 250Vac
- Signal contact customisation