



Liquid leak detection system FG-SYS digital Unit Product data



The FG-SYS digital unit is designed to be used with the liquid sense cables, FG-EC, FG-AC or FG-HC2. The presence of a liquid on the sense cable activates a luminous and audible alarm and displays the localization of the initial point of the leak to the nearest metre.

Modular And Upgradeable Design.

The FG-SYS digital unit is available in rack or wall mounted versions. The FG-SYS digital unit can in this way control from 1 to 120 lengths of sense cables independently and indicate for each one the type of defect (time and date, the name of the zone and localization in meters from the origin of leak).

User-Friendly Information.

Thirteen tactile buttons with an LCD backlit display, are the only external components on the front facia.

A "ACQ" button allows manual acknowledgement of the audible alarm. This key is also used, in the main menu and history record, to validate and to return to the previous

screen.

A "TEST" function is used to launch the general test procedure of the FG-SYS digital unit with its functionalities, the number of cables installed and their associated lengths.

A "CONFIGURATION" menu gives the designation of each length of non-associated sense cable, the adjustment of system parameters (time, date, audible alarm and language, etc.) The type and configuration of faults on the operation chosen, and the identification of the user through a password.

A "HISTORY" menu is used to return to the last thirty faults, chosen by type and date.

Each length of sense cable can be programmed and gives a specific designation of the room or floor inherent to each installation.

In the event of a leak, an audible alarm is triggered, the zone indicator light changes to red, the dry contact is activated and the display shows the time, date the fault starts, type of fault (leak or circuit interruption), zone

A configuration menu, both comprehensive and easy to use, ensures the conviviality, accuracy and reliability of the FG-SYS digital unit.


Compatibility And Operation.

FG-SYS digital unit is totally compatible with existing operating systems. There are eight, entirely configurable dry contacts available, RS232 and RS485 serial links with JBUS communication protocol for interfacing with executive, and streamline printing. These are the communication tools which enable the users to use all detection and alarm information in the best possible manner.

The FG-SYS digital unit contributes a solution adapted to the various safety policies inherent to each user.

TOPSurveillance®, utility software of the FG-SYS® detection system, is interface able with the FG-SYS digital unit.

The FG-SYS digital unit meets the requirements of all European Standards in EN 50081 and 50082 EMC.

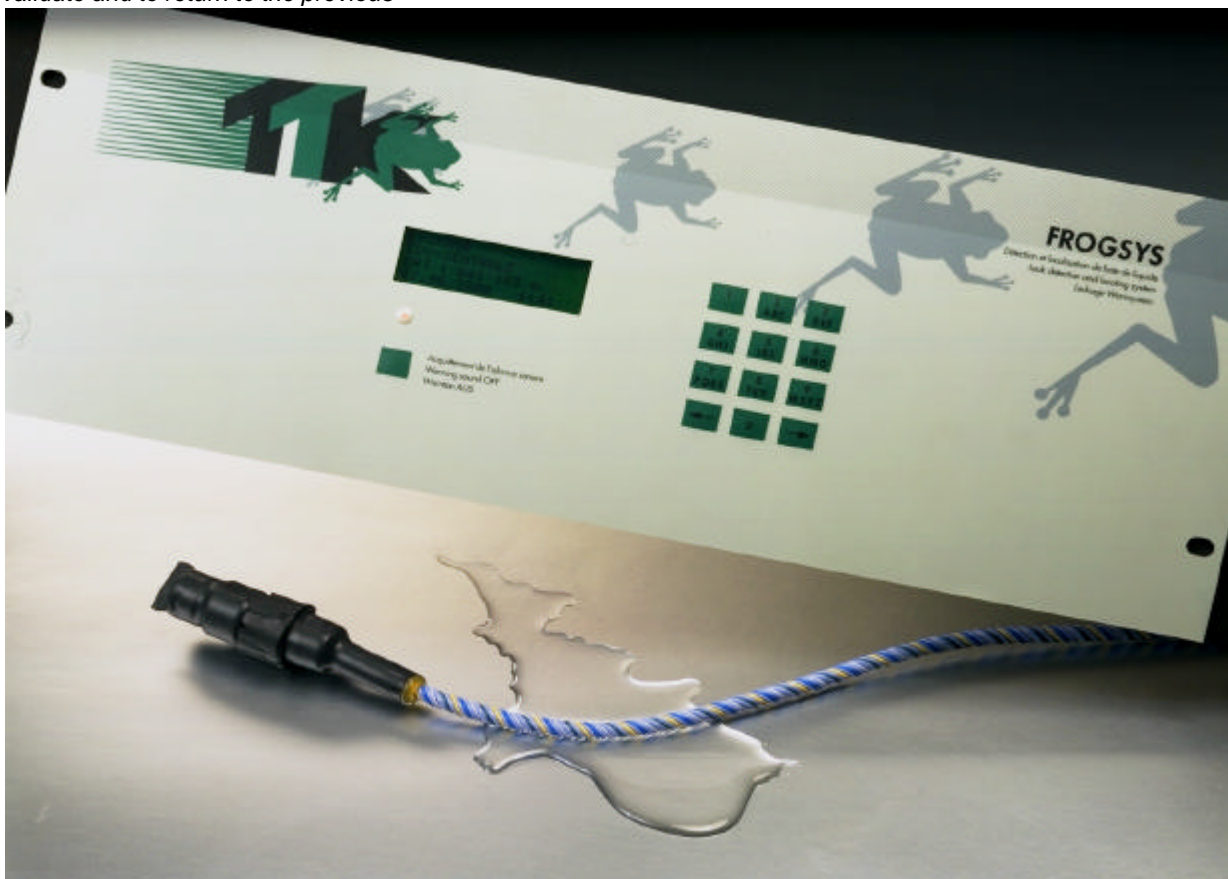

FG-SYS Digital Unit

Button Functions

Thirteen Tactile Buttons:

- **ACQ button:** for audible alarm; The key is also used for main menu and history records:
- **"T"est button:** to launch general test procedure.
- **"M"enu button:** to activate the menu configuration.
- **"H"istory button:** to return to the last thirty faults.

Terminal Block Wiring:

- **Power:** 220 V. power connector.
- **Circuits 1, 2, 3:** 4 pts connector for leader cable FG-CLC.
- **Relays:** 8 relays with 2 pts connectors programmable.
- **DB9 Male:** serial plug RS232/RS485 for JBUS communication and for dot printer.

LCD Panel Description

Normal Operating Condition: The FG-SYS digital unit does not detect any problem.

Leak Detection: a leak occurs in one of the monitored zones; a signal light turns to red, an alarm sounds, a de-energized relay is active; the display panel shows the time and date the problem began, the area name and the leaks distance in metres .

Cable Break: When the FG-SYS digital unit detects a circuit break in one of the monitored circuits; a signal light turns to red, an alarm sounds, a de-energized relay is activated; the display panel shows the time and date the problem began, and the area name.

Dimensions



FG-SYS F, Digital Unit Wall Mounted



FG-SYS E, Digital Unit rack Mounted,
in 4U and 19". Width: 484 mm and high: 176 mm

Technical Information

Supply voltage:	220 v. 50 Hz. 16 VA.
Fusing:	500 mA fuse + Filter
Working temperature range:	0 to 50° C.
Weight:	2 Kg.
Construction:	A.B.S. fixed or encased 19" on 4U
Alarm relays:	Eight relays to be programmed
Relays types:	1 RT, Open or Close in a non active state
Max. switching voltage:	125 V. AC and 60 V. DC
Max. switching capacity:	62,5 VA or 30 W.
Electromagnetic European harmonised standards:	EN 50081-1 (92) and EN 50082-1 (92) (report reference n° 8080612-CQPE/1 dated 14/09/1998)

Identification codes

FG-SYS F (Wall Mounted)	FG-SYS Digital Unit wall mounted
FG-SYS E (Rack Mounted)	FG-SYS Digital Unit rack mounted in 19"
FG-EC, FG-AC or FG-HC2	Digital Sense Cables in 3m, 7m, and 15m lengths
FG-CLC	Leader cable (3m lengths)
FG-TMC	End termination plug
FG-DTC	"T" Branch Diversion Box

This brochure with its photos, illustrations and charts were carefully prepared, but may only be taken as examples. TTK UK Ltd cannot guarantee that the information given contains no errors or omissions and will accept no responsibility related to the usage of its equipment. TTK's only obligations are those set forth in the Standard Terms and Conditions of Sale and will not under any circumstances be held liable for any incidental, indirect or consequential damages arising from the sale, resale or misuse of this product. The purchasers are the sole judges of the product's adaptability to the use for which it is destined. FROG-SYS and TOPSurveillance are trademarks of TTK SAS.

FG-SYS Products:

FG-SYS_uk5.pub
01.2003

TTK UK Ltd.
26 Elder Street
London
E1 6BT
Tel: 0207 375 0721—Fax.: 0207 375 0748
www.ttkuk.com—Email: sales@ttkuk.com